




## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> : <b>H04Q 7/38</b>	<b>A1</b>	(11) International Publication Number: <b>WO 99/25146</b> (43) International Publication Date: 20 May 1999 (20.05.99)
<p>(21) International Application Number: PCT/US98/23685</p> <p>(22) International Filing Date: 6 November 1998 (06.11.98)</p> <p>(30) Priority Data: 08/965,920 7 November 1997 (07.11.97) US</p> <p>(71) Applicant: ERICSSON INC. [US/US]; 7001 Development Drive, P.O. Box 13969, Research Triangle Park, NC 27709 (US).</p> <p>(72) Inventor: OSTLING, Ralph; 1411 Stonecrest Drive, Richardson, TX 75081 (US).</p> <p>(74) Agents: BACON, Jeffery, E. et al.; Jenkins &amp; Gilchrist, P.C., Suite 3200, 1445 Ross Avenue, Dallas, TX 75202 (US).</p>	<p>(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).</p> <p>Published With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</p>	

(54) Title: HANDOVER BETWEEN FIXED AND MOBILE NETWORKS FOR DUAL MODE PHONES

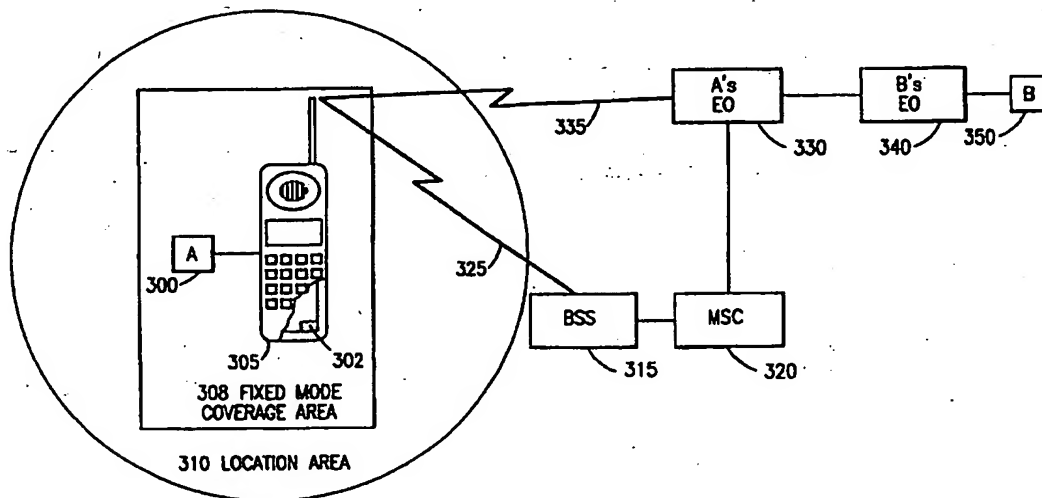

## (57) Abstract

A telecommunications system and method for performing a handover between the fixed (wireline) network and a mobile network during a call placed to or from a dual mode device, without any interruption in the voice or data connection. Therefore, for calls initiated in the fixed network, once the subscriber leaves the coverage area for the fixed mode of the dual mode device, the call continues as normal by transferring the call to the mobile network. Similarly, for calls initiated in the mobile network, once the subscriber moves back into the fixed mode coverage area, the call can be transferred to the fixed network in order to provide a lower rate to the subscriber, without any service interruption.

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

## HANDOVER BETWEEN FIXED AND MOBILE NETWORKS FOR DUAL MODE PHONES

### BACKGROUND OF THE PRESENT INVENTION

#### 5        Field of the Invention

The present invention relates generally to telecommunications systems and methods for transferring a call between a mobile network and a fixed network, and specifically to performing a handover between the fixed network and a mobile network during a call placed to or from a dual mode phone, without any interruption in the voice or data connection.

#### 10       Background and Objects of the Present Invention

Cellular telecommunications is one of the fastest growing and most demanding telecommunications applications ever. Today it represents a large and continuously increasing percentage of all new telephone subscriptions around the world.

15       Cellular networks have evolved into two different networks. The European cellular network primarily uses the Global System for Mobile Communication (GSM) digital mobile cellular radio system. In the United States, cellular networks have been, in the past, primarily analog, but many North American cellular networks have begun deploying Signaling System #7 (SS7) to support access of remote databases. SS7  
20       relies on Common Channel Signaling, which uses a digital facility, but places the signaling information in a time slot or channel separate from the voice and data it is related to. This allows signaling information to be consolidated and sent through its own network apart from the voice network. European GSM cellular networks have always relied on SS7 for their signaling requirements. However, GSM is presently  
25       being used in North America, and may be the technology of choice for supporting the new Personal Communications System.

The GSM network is described herein below and is discussed in relation to FIGURE 1 of the drawings. With reference now to FIGURE 1 of the drawings, there is illustrated a GSM Public Land Mobile Network (PLMN), such as cellular network  
30       10, which in turn is composed of a plurality of areas 12, each with a Mobile Services

-2-

Center (MSC) 14 and an integrated Visitor Location Register (VLR) 16 therein. The MSC/VLR areas 12, in turn, include a plurality of Location Areas (LA) 18, which are defined as that part of a given MSC/VLR area 12 in which a mobile station (MS) 20 may move freely without having to send update location information to the MSC/VLR area 12 that controls the LA 18. Each Location Area 12 is divided into a number of cells 22. Mobile Station (MS) 20 is the physical equipment, e.g., a mobile phone or other portable device, used by mobile subscribers to communicate with the cellular network 10, each other, and users outside the subscribed network, both wireline and wireless.

10           The MSC 14 is in communication with at least one Base Station Controller (BSC) 23, which, in turn, is in contact with at least one Base Transceiver Station (BTS) 24. The BTS is the physical equipment, illustrated for simplicity as a radio tower, that provides radio coverage to the geographical part of the cell 22 for which it is responsible. It should be understood that the BSC 23 may be connected to several base transceiver stations 24, and may be implemented as a stand-alone node or integrated with the MSC 14. In either event, the BSC 23 and BTS 24 components, as a whole, are generally referred to as a Base Station System (BSS) 25.

20           With further reference to FIGURE 1, the PLMN Service Area or cellular network 10 includes a Home Location Register (HLR) 26, which is a database maintaining all subscriber information, e.g., user profiles, current location information, International Mobile Subscriber Identity (IMSI) numbers, and other administrative information. The HLR 26 may be co-located with a given MSC 14, integrated with the MSC 14, or alternatively can service multiple MSCs 14, the latter of which is illustrated in FIGURE 1.

25           The VLR 16 is a database containing information about all of the Mobile Stations 20 currently located within the MSC/VLR area 12. If a MS 20 roams into a new MSC/VLR area 12, the VLR 16 connected to that MSC 14 will request data about that Mobile Station 20 from the HLR database 26 (simultaneously informing the HLR 26 about the current location of the MS 20). Accordingly, if the user of the MS 20 then wants to make a call, the local VLR 16 will have the requisite identification information without having to reinterrogate the HLR 26. In the aforescribed

30

-3-

manner, the VLR and HLR databases 16 and 26, respectively, contain various subscriber information associated with a given MS 20.

SS7 protocols are used throughout the GSM cellular network to provide the signaling information required to establish circuit connections and disconnect circuit connections, as well as share database information from one entity to another. In addition, the signaling information used to connect calls within the Public Switched Telephone Network (PSTN) 29 (fixed or wireline network) is sent through the SS7 network. The MSC 14 connects to the SS7 network via a Signaling Transfer Point (STP) 28.

Dual mode phones, which are cordless phones connected to both the fixed network 29 and a mobile network 10, e.g., GSM, PCS, or an analog system, are currently being developed to enable a subscriber to have only one phone to handle both fixed and mobile calls. The subscriber pays for subscriptions to both the fixed network and to the mobile network, and has two separate phone numbers, one for each network. Advantageously, both phone numbers will correspond to one dual mode phone, which allows the subscriber to place and receive calls within the range of the fixed mode of the cordless dual mode phone using the fixed network 29, and to make and receive calls in any other location using the mobile network 10.

However, there is no existing method for transferring a call between the fixed network 29 and a mobile network 10 during a call. Typically, if a call is initiated in the fixed environment, and the subscriber leaves the fixed mode coverage area, e.g., the range of the cordless phone connected to the fixed network, the call will be lost. This requires the subscriber to re-dial the called party, using the mobile mode of the dual mode phone, in order to continue the conversation. Similarly, if a call is initiated in the mobile network, and the dual mode phone moves into the fixed mode coverage area for that phone, the call will not be transferred to the fixed network, which typically provides lower rates to subscribers than the mobile network.

It is therefore an object of the invention to perform a handover between the fixed network and a mobile network during a call without losing the speech connection, and without an interruption in service to the subscriber.

-4-

## SUMMARY OF THE INVENTION

The present invention is directed to telecommunications systems and methods for performing a handover between the fixed network and a mobile network during a call placed to or from a dual mode device, without any interruption in the voice or data connection. Therefore, for calls initiated in the fixed network, once the subscriber leaves the coverage area for the fixed mode of the dual mode device, the call continues as normal by transferring the call to the mobile network. Similarly, for calls initiated in the mobile network, once the subscriber moves back into the fixed mode coverage area, the call can be transferred to the fixed network in order to provide a lower rate to the subscriber, without any service interruption.

## BRIEF DESCRIPTION OF THE DRAWINGS

The disclosed invention will be described with reference to the accompanying drawings, which show important sample embodiments of the invention and which are incorporated in the specification hereof by reference, wherein:

FIGURE 1 is a block diagram of a conventional terrestrially-based wireless GSM telecommunications system;

FIGURES 2 depicts steps in a sample embodiment of the dual mode phone handover process of the present invention;

FIGURE 3 is a block diagram showing the interconnection of the various nodes during a dual mode phone handover between the fixed network and a mobile network; and

FIGURE 4 illustrates the implementation of one aspect of the handover process of the present invention within the dual mode phone itself.

## DETAILED DESCRIPTION OF THE PRESENTLY PREFERRED EXEMPLARY EMBODIMENTS

The numerous innovative teachings of the present application will be described with particular reference to the presently preferred exemplary embodiment. However, it should be understood that this class of embodiments provides only a few examples of the many advantageous uses of the innovative teachings herein. In general, statements made in the specification of the present application do not necessarily

-5-

delimit any of the various claimed inventions. Moreover, some statements may apply to some inventive features but not to others.

5 Dual mode phones have two subscriptions associated with them, one in a mobile network and one in the fixed (local) network. As shown in FIGURE 2, which will be discussed in connection with FIGURE 3, once a call is placed to or from a dual mode phone subscriber 300 (hereinafter referred to as Subscriber A) within the fixed network (step 200), a call connection between Subscriber A's end office 330 and the calling/called party's (hereinafter referred to as Subscriber B) end office 340 is initiated (step 205). Thereafter, a voice connection between Subscriber A 300 and  
10 Subscriber B 350 is established (step 210).

Once Subscriber A 300 begins to leave the coverage area for the fixed mode 308 of the dual mode phone 305, a Handover Application 302 within the dual mode phone 305 detects that the signal strength is weakening (step 215), and initiates a new call to the mobile number associated with the dual mode phone 305 (step 220). The  
15 fixed mode coverage area 308 for the dual mode phone 305 varies depending on the phone used, but typically only encompasses a very limited area, e.g., less than a quarter of a mile. However, for some phones, the fixed mode coverage area 308 consists of several small isolated areas, such as within several different office buildings, each in a separate location.

20 The handover process begins by the Handover Application 302 sending the digits associated with Subscriber A's 300 mobile number to Subscriber A's end office 330 (step 220). Subscriber A's end office 330 then sends a signaling message to the Mobile Services Center (MSC) 320 serving the Location Area (LA) 310 that Subscriber A 300 is in to establish a call connection between Subscriber A's end office  
25 330 and the MSC 320 (step 225). Thereafter, the MSC 320 delivers the calling number (fixed number) in, for example, a SETUP message, to Subscriber A's dual mode phone 305 (step 230) via a Base Station System (BSS) 315 to be received by the Handover Application 302 within the dual mode phone 305. The Handover Application 302 then determines that the calling number is the fixed number  
30 associated with the dual mode phone (step 235), and instructs the dual mode phone 305 to "answer" the call (step 240). A call transfer from the fixed mode of the dual

-6-

mode phone 305 to the mobile mode of the dual mode phone 305 (step 245) is then initiated by the Handover Application 302.

After the mobile connection is established (step 245), the Handover Application 302 within the dual mode phone 305 disconnects the link 335 between the dual mode phone 305 and Subscriber A's end office 330 (step 250). Thus, the call is now routed through Subscriber A's end office 330 to be handled by the MSC 320. Advantageously, this handover process does not produce any interruption in the call, and allows the call to continue even though Subscriber A 300 has crossed the perimeter of the fixed mode coverage area 308 and left the fixed mode coverage area 308. The fixed mode coverage area 308 is typically substantially within the location area 310 covered by the MSC 320. However, it should be noted that the fixed mode coverage area 308 could lie along an edge covered by two separate MSC's 320.

This process resembles a three-way call, in which two of the parties involved are associated with the dual mode phone 305. As such, when the Handover Application 302 within the dual mode phone 305 connects Subscriber A's end office 330 and the MSC 320, the handling of the call is similar to a three-way call, in which all of the parties are connected simultaneously. Thereafter, the process resembles a call transfer process, in which calls to or from the fixed network 330 are routed through the fixed network 330 to the mobile network 320. The tear-down of the link between Subscriber A's end office 330 and the dual mode phone 305 then follows a typical tear-down of a three-way call, in which the links between each of the parties are disconnected separately. In this case, only the link 355 between the dual mode phone 305 and Subscriber A's end office 330 is severed. Thereafter, the remaining links between Subscriber A 300 and Subscriber B 350 can be disconnected by normal call termination.

In alternative embodiments of the present invention, since the billing rate is normally higher in mobile networks than in fixed networks, prior to transferring the call from the fixed network to the mobile network, the subscriber can be notified, *e.g.*, with a tone or series of tones on the dual mode phone 305, indicating to the subscriber that a handover to the mobile network is about to take place. Therefore, the subscriber can have the option of returning to the fixed mode coverage area 308 of the dual mode



-7-

phone 305, continuing the call using the mobile network, or disconnecting the call. If the subscriber chooses to return to the fixed mode coverage area 308, another tone or series of tones can be provided to the subscriber to notify the subscriber that the dual mode phone 305 has re-entered the fixed mode coverage area 308.

5           In another alternative embodiment, as shown in FIGURE 4, the dual mode phone 400 can have a "handover" button 410, which the subscriber presses to manually initiate the handover. In this embodiment, the dual mode phone 400 can send a signal strength warning tone to the subscriber, indicating that the subscriber is leaving the fixed mode coverage area 308, which would allow the subscriber to either  
10           press the "handover" button 410 and initiate the call transfer, return to the fixed mode coverage area 308, or disconnect the call before the subscriber leaves the fixed mode coverage area 308.

          It should be noted that the aforescribed handover process also applies when a call is initiated in the mobile network, and the subscriber moves into the fixed mode  
15           coverage area 308. In this situation, a mobile network to fixed network handover can be initiated by the Handover Application 302 within the dual mode phone 305. This is accomplished by the Handover Application 302 first recognizing that the fixed mode coverage area 308 has been entered, e.g., by comparing the location update information received by the Base Station System 315 with stored fixed mode location  
20           information, and then sending the dialed digits associated with the fixed number to the MSC 320 via the BSS 315. The process can then continue as stated hereinbefore, with the end result being that the call is transferred to the fixed network and the mobile link 325 between the dual mode phone 305 and the MSC 320 is disconnected.

          As will be recognized by those skilled in the art, the innovative concepts  
25           described in the present application can be modified and varied over a wide range of applications. Accordingly, the scope of patented subject matter should not be limited to any of the specific exemplary teachings discussed.

          For example, it should be noted that the handover process disclosed herein is applicable to all mobile networks, including, but not limited to, AMPS, and D-AMPS,  
30           and is not limited to GSM or PCS networks.

-8-

It should also be noted that this application can be applied to other dual mode devices, e.g., laptop computers, which are connected to both the fixed network and the mobile network, and should not be limited to dual mode phones.

-9-

**WHAT IS CLAIMED IS:**

1. A telecommunications system for performing a handover between a fixed network and a mobile network during a call on a given one of a plurality of dual mode devices, said telecommunications system comprising:

5 an end office within said fixed network, said end office being connected to said given dual mode device;

a mobile services center within said mobile network, said mobile services center being in wireless communication with said given dual mode device; and

10 a handover application located within said given dual mode device, said handover application performing said handover between said end office and said mobile services center during said call when said given dual mode device crosses the perimeter of a fixed mode coverage area associated with said given dual mode device, said fixed mode coverage area being substantially within a mobile coverage area of said mobile services center.

15

2. The telecommunications system of Claim 1, wherein said call is routed via a link between said end office and said given dual mode device, said handover application detecting when said given dual mode device leaves said fixed mode coverage area and sending a mobile number associated with said given dual mode device to said end office, said end office establishing a connection with said mobile services center, said mobile services center forwarding a calling number to said handover application within said given dual mode device, said handover application recognizing said calling number as a fixed number associated with said given dual mode device, transferring said call to said mobile services center, and disconnecting  
20 said link between said given dual mode device and said end office.

25

3. The telecommunications system of Claim 2, wherein said handover application detects when said given dual mode device leaves said fixed mode coverage area by monitoring when the signal strength of said given dual mode device within  
30 said fixed mode coverage area weakens.

-10-

4. The telecommunications system of Claim 2, wherein said calling number is sent to said given dual mode device in a SETUP message.

5. The telecommunications system of Claim 1, wherein said call is routed via a link between said mobile services center and said given dual mode device, said handover application determining when said given dual mode device enters said fixed mode coverage area and sending a fixed number associated with said given dual mode device to said mobile services center, said mobile services center establishing a connection with said end office, said end office forwarding a calling number to said handover application within said given dual mode device, said handover application recognizing said calling number as a mobile number associated with said given dual mode device, transferring said call to said end office, and disconnecting said link between said mobile services center and said given dual mode device.

6. The telecommunications system of Claim 5, wherein said handover application determines when said given dual mode device enters said fixed mode coverage area by comparing first location information sent from said mobile services center with second location information associated with said fixed mode coverage area stored within said given dual mode device.

7. The telecommunications system of Claim 1, wherein said given dual mode device contains a handover button, said handover button being used to activate said handover application.

8. The telecommunications system of Claim 1, wherein said given dual mode device conveys, during said call, at least one tone to a subscriber associated with said given dual mode device when the location of said given dual mode device changes with respect to said fixed mode coverage area.

9. The telecommunications system of Claim 1, further comprising a base station system attached to said mobile services center and being in wireless

-11-

communication with said given dual mode device.

10. A method for performing a handover within a telecommunications system between a fixed network and a mobile network during a call on a given one of a plurality of dual mode devices, said method comprising the steps of:

5 determining, by a handover application located within said given dual mode device, during said call, when said given dual mode device crosses the perimeter of a fixed mode coverage area associated with said given dual mode device;

10 transmitting, by said handover application, a called number associated with said given dual mode device to both an end office within said fixed network and a mobile services center within said mobile network, said end office being in communication with said given dual mode device, said mobile services center being in wireless communication with said given dual mode device, said fixed mode coverage area being substantially within a mobile coverage area of said mobile services center;

15 forwarding, by said end office and said mobile services center, a calling number associated with said given dual mode device to said handover application within said given dual mode device; and

20 performing, by said handover application, said handover of said call between said end office and said mobile services center.

11. The method of Claim 10, wherein said step of performing said handover is accomplished by said handover application transferring said call from said end office to said mobile services center.

25

12. The method of Claim 11, further comprising the step of: after said step of performing said handover, disconnecting, by said handover application, a link between said end office and said given dual mode device.

-12-

13. The method of Claim 11, wherein said handover application transfers said call from said end office to said mobile services center when said given dual mode device leaves said fixed mode coverage area.

5 14. The method of Claim 13, wherein said step of determining is performed by said handover application monitoring when the signal strength of said given dual mode device within said fixed mode coverage area weakens.

10 15. The method of Claim 11, wherein said called number is a mobile number associated with said given dual mode device and said calling number is a fixed number associated with said given dual mode device.

15 16. The method of Claim 10, wherein said step of performing said handover is accomplished by said handover application transferring said call from said mobile services center to said end office.

20 17. The method of Claim 16, further comprising the step of: after said step of performing said handover, disconnecting, by said handover application, a link between said given dual mode device and said mobile services center.

18. The method of Claim 16, wherein said handover application transfers said call from said mobile services center to said end office when said given dual mode device enters said fixed mode coverage area.

25 19. The method of Claim 18, wherein said step of determining is performed by said handover application comparing first location information transmitted by said mobile services center to said given dual mode device with second location information associated with said fixed mode coverage area stored within said dual mode device.

30 20. The method of Claim 16, wherein said called number is a fixed number

-13-

associated with said given dual mode device and said calling number is a mobile number associated with said dual mode device.

21. The method of Claim 10, wherein said step of transmitting said called  
5 number is performed by said handover application sending said called number to said end office, said end office establishing a connection with said mobile services center and sending said called number to said mobile services center.

22. The method of Claim 21, wherein said step of forwarding said calling  
10 number is performed by said end office sending said calling number to said mobile services center, said mobile services center transmitting said calling number to said handover application within given dual mode device.

23. The method of Claim 10, wherein said step of transmitting said called  
15 number is performed by said handover application sending said called number to said mobile services center, said mobile services center establishing a connection with said end office and sending said called number to said end office.

24. The method of Claim 23, wherein said step of forwarding said calling  
20 number is performed by said mobile services center sending said calling number to said end office, said end office transmitting said calling number to said handover application within said dual mode device.

25. The method of Claim 10, wherein said given dual mode device contains  
25 a handover button, said handover button being used to begin said step of transmitting said called number.

-14-

26. The method of Claim 10, wherein said given dual mode device conveys, during said call, at least one tone to a subscriber associated with said given dual mode device when the location of said given dual mode device changes with respect to said fixed mode coverage area.

5

27. The method of Claim 10, wherein said telecommunications system further includes a base station system attached to said mobile services center and being in wireless communication with said given dual mode device.

10

28. The method of Claim 10, wherein said step of forwarding said calling number is performed by sending said calling number to said handover application within said given dual mode device in a SETUP message.



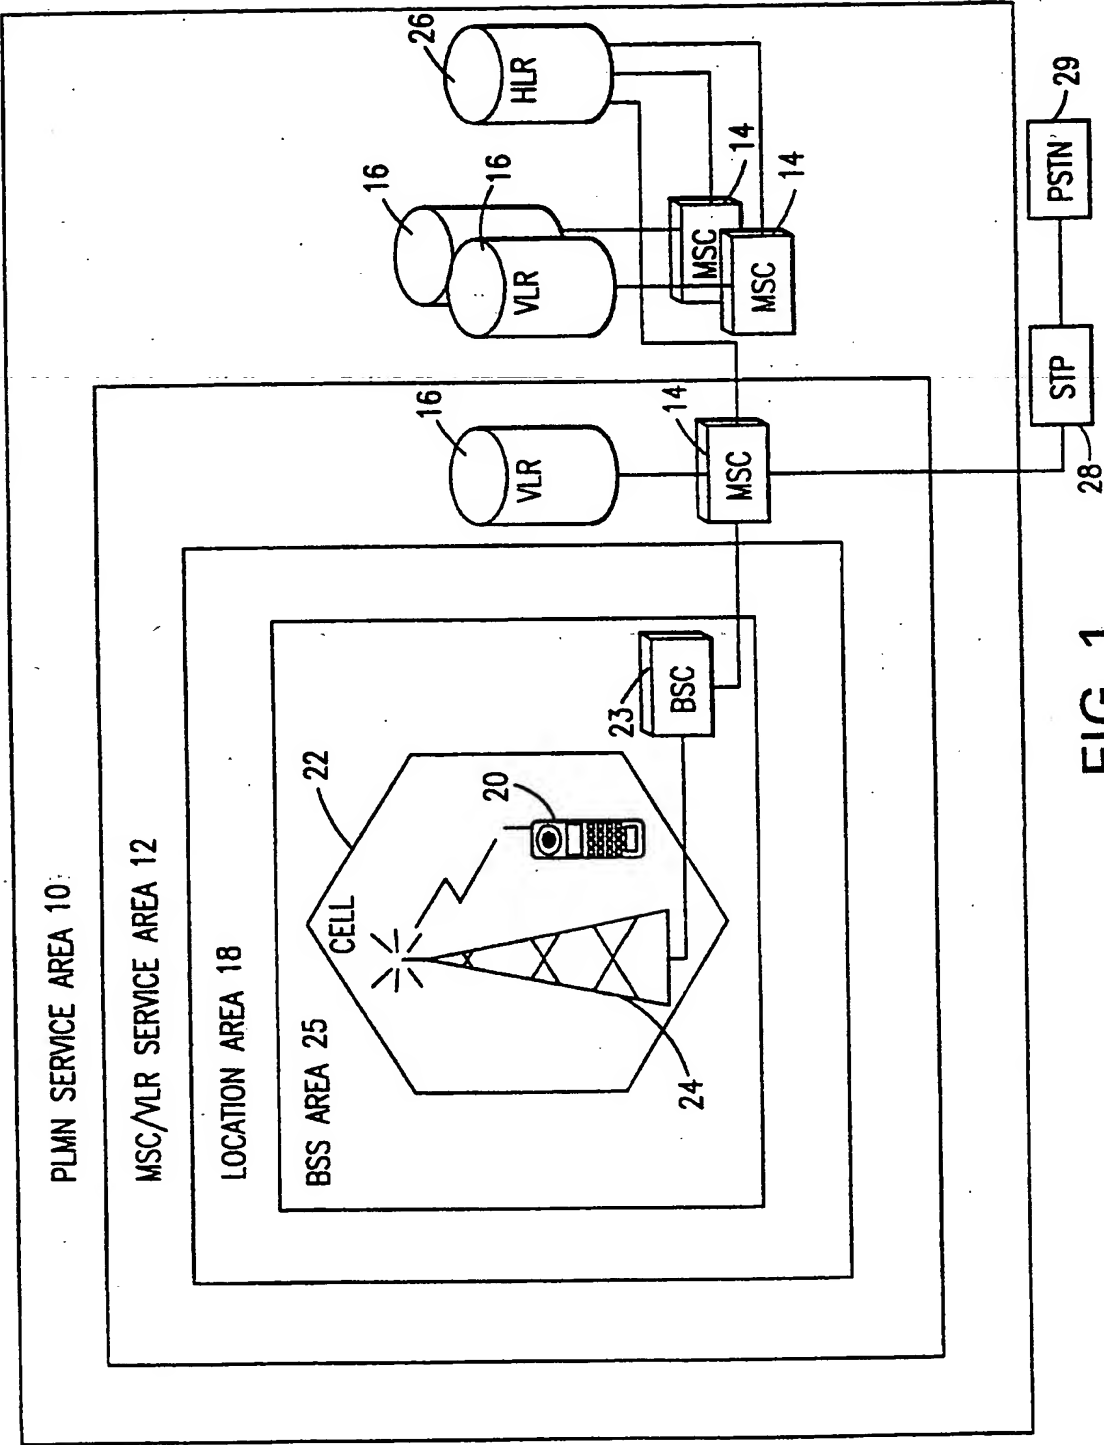


FIG. 1

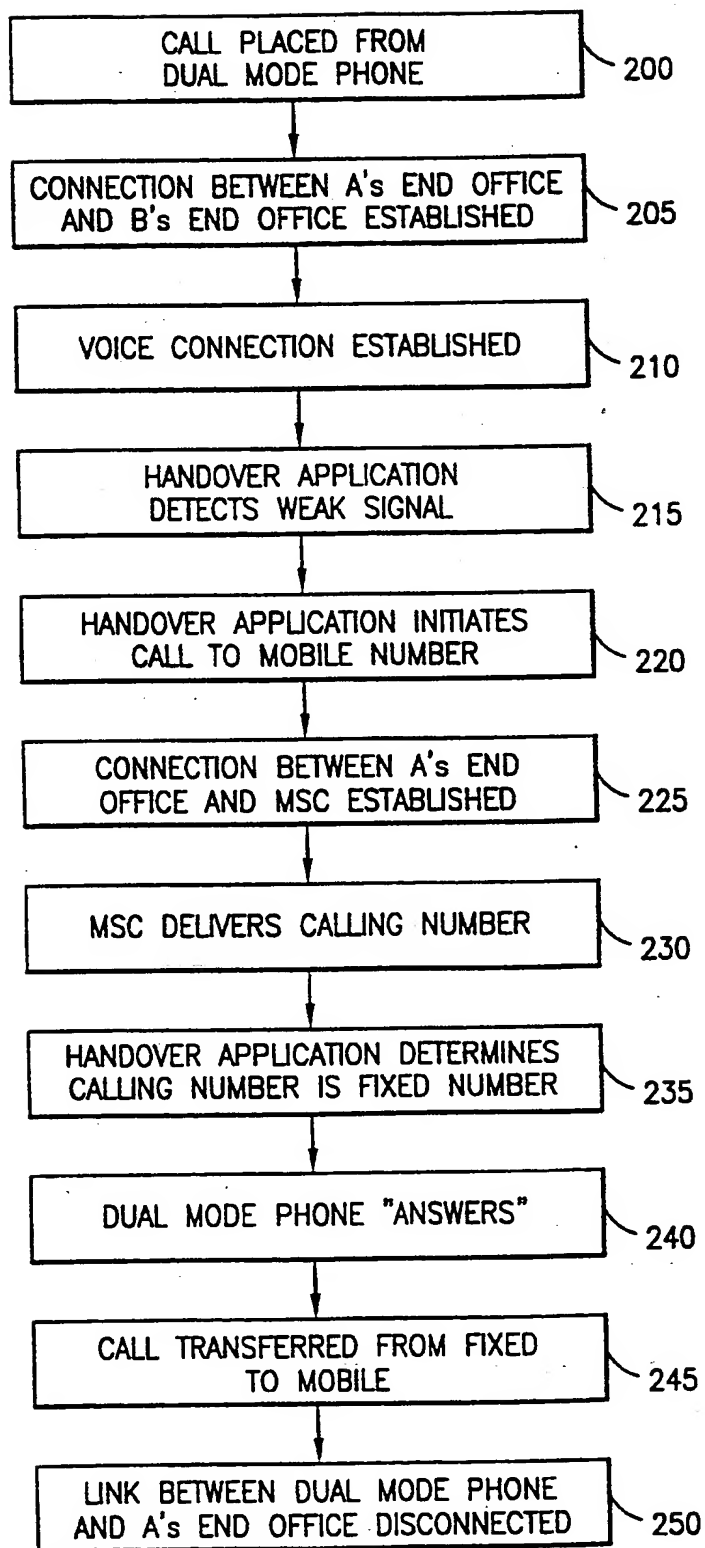


FIG. 2

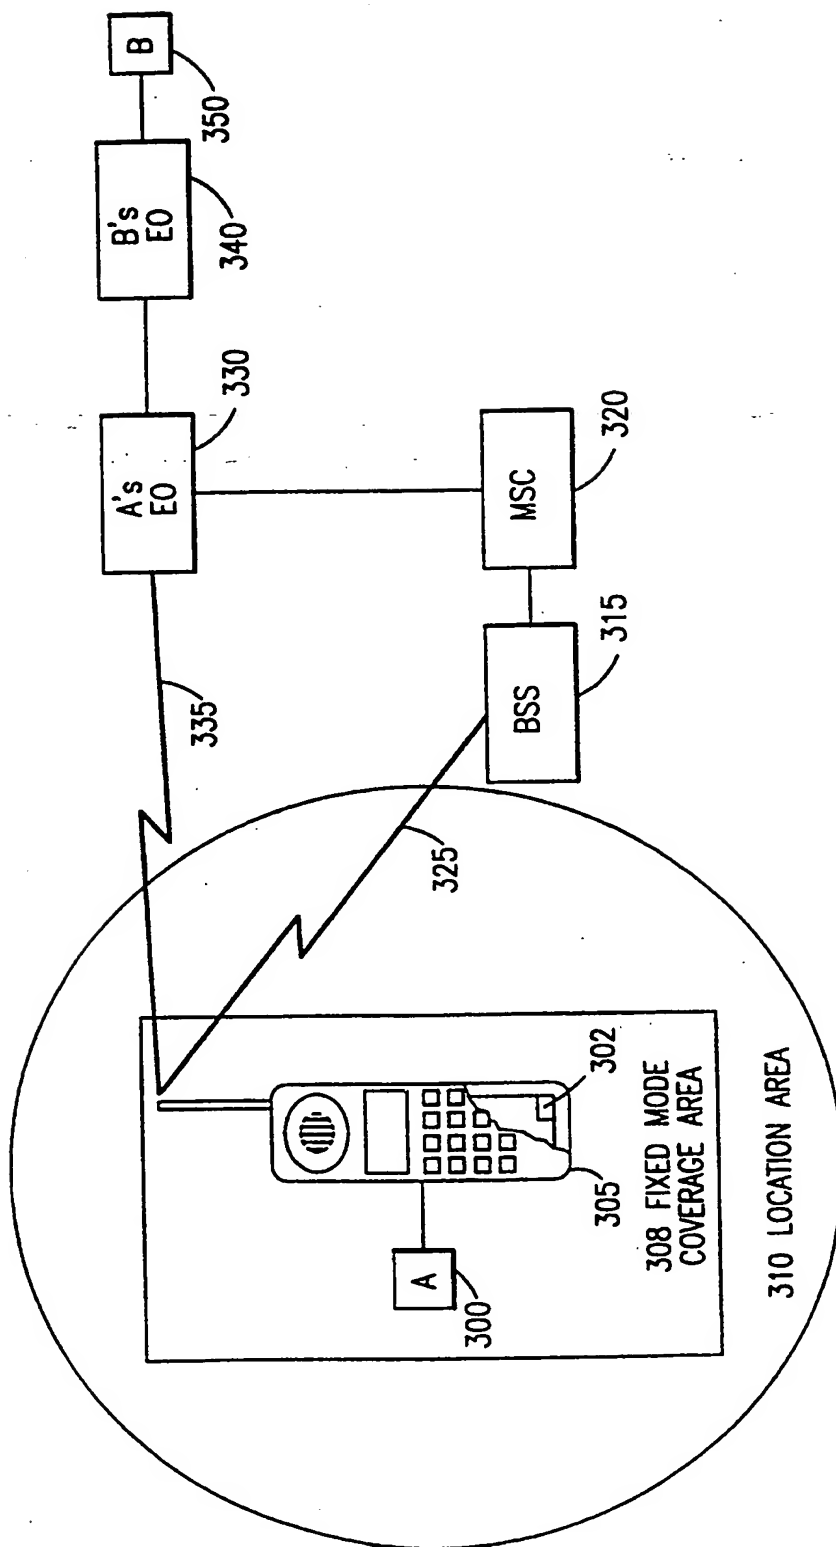


FIG. 3

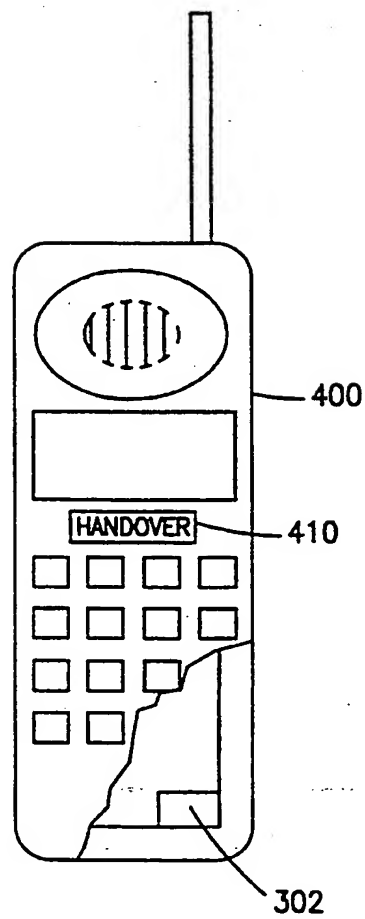


FIG. 4

# INTERNATIONAL SEARCH REPORT

Int. Patent Application No

PCT/US 98/23685

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 6 H04Q7/38

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 H04Q

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X A	EP 0 700 167 A (AT & T CORP) 6 March 1996 see column 10, line 1 - column 13, line 33 ----	1,5-9 2-4, 10-28
X A	EP 0 695 104 A (SIEMENS ROLM COMM INC) 31 January 1996 see column 2, line 45 - column 8, line 40 ----	1,7-9 2-6, 10-28
A	US 5 659 598 A (JAERVELAE TEUVO ET AL) 19 August 1997 see column 5, line 12 - column 6, line 16 -----	1,10

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

### \* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

6 April 1999

Date of mailing of the international search report

12/04/1999

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Kokkoraki, A

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 98/23685

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0700167 A	06-03-1996	SG 42907 A	17-10-1997
		US 5406615 A	11-04-1995
		FI 943686 A	05-02-1995
		US 5574775 A	12-11-1996
EP 0695104 A	31-01-1996	FI 953559 A	26-01-1996
		US 5594781 A	14-01-1997
US 5659598 A	19-08-1997	GB 2282730 A	12-04-1995
		AU 673294 B	31-10-1996
		AU 7785094 A	04-05-1995
		EP 0673586 A	27-09-1995
		JP 8504314 T	07-05-1996
		CN 1115593 A	24-01-1996
		WO 9510922 A	20-04-1995